

TM



**Manufacturer, Dealers, Import & Export
of
Print Finishing Equipments required in
Printing & Packaging Industries**



AUTHORISED DISTRIBUTOR OF

intec
Part of the Plockmatic Group

YOYOCUT[®]
Registered Trade Mark of JINDAL OFFSET INDIA PVT. LTD.
Autofeed Digital Label Cutter

MARVEL
CUT

HAMADA[®]

For More Details Visit our Website : marvelprintpacksolutions.com

COMPANY PROFILE

Company Name: **MARVEL PRINT PACK SOLUTIONS.**

Proprietor: Mr. Ashwin A. Parmar

Established Date: 01/03/2019.

Marvel Print Pack Solutions deals in Manufacturing, Import, Export, of Print Finishing Equipments Used in Printing & Packaging Industries.

Mr. Ashwin Parmar, the proprietor of the company has a work experience of over 25 years for print finishing equipment's and has a strong technical background experience from since childhood. and has also works as a sales & marketing manager /National Level as well as worked as a Service Manager for handling service technical engineers.

Our Vision: A Global leader in brands & Technology. Our vision gives us a sense of direction and destination. It captures our aspirations of being the best in everything we do. It is the basis for what we all stand for as one company. Our vision and our values guide the choices and decisions our employee make every day.

Our Values: We put our customers at the centre of what we do. We value, challenge and reward our people. We drive excellent sustainable financial performance.

Our Mission:

- 1) To maintain our position as the market leader in Printing & Packaging Industry.
- 2) To be well known and reputable with service oriented company.
- 3) To enrich our experience in Printing & Packaging Industries.
- 4) We at Marvel Print Pack Solutions strive to be the best in our field when it comes to cost efficient of our products and Client Satisfaction.

We have a network team of sales dealership of around 10 dealers pan India and approximately 15 free lance sales partners pan India. Marvel Print Pack Solutions has a well experience and educated team of sales & service engineers to satisfy customer technical machine issues and make availability of branded original spares & consumables used in the machines at all available time of requirements.

Marvel Print Pack Solutions started on 01/03/2019 with a small team with a expansion and growth plan .Today we have a well professional team for Sales, Service, Accounts, and Logistics, without time barrier for extended office hours efficient working to complete the task.

Marvel Print Pack Solutions believes in activities for advertising, events participations like exhibitions, road shows, and timely news letter and advertise in print industries magazines

Marvel Print Pack Solutions ,looks the future for developing the products used for different industries to cater, also implement on information's gathered by different industries for their solutions to reduce the manpower and cost cuttings of finished goods or services.

Marvel Print Pack Solutions has purely involved in safety, health and environmental policies for the Industry and manpower.

Marvel Print Pack Solutions has a more numbers of client portfolio, where we have served with proper and timely services and spares availability. We have helped to training and educated our clients with our products capacities and ability of working with new trends and creativity in the industry.

Marvel Print Pack Solutions are in the process for achieving rewards and awards and certifications.

Thank you again for giving us the opportunity to present Marvel Print Pack Solutions. Should you have any question/s, Please do not hesitate to contact us.

Kind Regards

From: Mr. Ashwin Parmar (Proprietor)



DIGITAL LABEL DIE CUTTER

Technical Specification

Max media width	: 330 mm
Max cutting width	: 320 mm
Blank size	: 5mm edge margin
Mainboard	: high Speed Arithmetic Microprocessor 4MB cache
Interface	: USB / U Disk
Control Panel	: Thin film switch (Life 1 million times)
Driver	: Digital DC, step motor, Micro step driver
Display	: 2*16 high resolution LCD
Drawing Instruction	: DMPL/HP-GL
Max cutting speed	: 900
Max cutting thickness	: 1mm
Pressure	: 50-800g (160 Grade digital adjustable)
Mechanical Precision	: 0.025mm
Repeatable Precision	: <+-0.1mm
Power Supply	: AC90-220V/50Hz
Positioning Model	: Bounded system, random Original point setting
Working Model	: Roller ,single ,Multiple media auto feeding
Operational Environment	: +5~+35°, relative humidity 30%-70%
Gross weight	: 30kg
Machine Dimension	: 765*570*365mm



Technical Specification

Max media width	: 335 mm
Max cutting width	: 320 mm
Blank size	: 5mm edge margin
Mainboard	: High Speed Arithmetic Microprocessor, 32Bit+8BIT MCU(Dual Core) 1GB Cache
Interface	: USB / U Disk / WIFI & Network
Control Panel	: Thin film switch (Life 1 million times)
Driver	: Digital DC, step motor, Micro step driver
Display	: 2*16 high resolution LCD 1.7" LCD for Camera
Drawing Instruction	: DMPL/HP-GL
Max cutting speed	: 1200
Max cutting thickness	: 1mm
Pressure	: 50-1700g (160 Grade digital adjustable)
Mechanical Precision	: 0.025mm
Repeatable Precision	: <+-0.1mm
Power Supply	: AC90-220V/50Hz
Positioning Model	: Bounded system, random Original point setting
Working Model	: Roller ,single ,Multiple media auto feeding
Operational Environment	: +5~+35°, relative humidity 30%-70%
Gross weight	: 31 kg
Machine Dimension	: 685X650X290mm



Software Compatibility :
CoreIDRAW / illustrator Plug-in,
PC Only

DIGITAL LABEL CUTTER

Technical Specification

Model	: ZD350 PRO MAX
Maximum media width	: 350mm
Max cutting width	: 330mm
Auto feeding quantity	: 150 Sheets
Motor	: Servo motor
Positioning mode	: CCD camera
Interface	: U-disk/USB/WiFi(Optional)
Power	: <100W
Maximum standby speed	: 1500mm/s
Maximum cut speed	: 1500mm/s
Force	: 2000g
Accuracy	: ±0.1mm
Repeat & positioning accuracy	: ±0.082mm
Power supply (V/A)	: 220V 50A
Working environment	: 5°C-35°C
Cutable material	: All kinds of self-adhesive labels, : printing graphics, etc.
OS/Software	: Windows XP 7/8/10 CorelDRAW/AI Plug-in : Signmaster Contour edge patrol software
Certification	: CE/RoHS/FCC
Packing size	: 775*505*410 (mm)
Gross Weight	: 55kg

Features

FASTEST LABEL CUTTER IN INDIA
QR CODE READING SYSTEM
SERVO MOTOR
CCD CAMERA DETECTION

Model
ZD 350
PRO MAX



Speed 1500

SPEEDOCUT A6 PLUS - Single Head SPEEDOCUT A6 PRO PLUS - Double Head

Features

FASTEST LABEL CUTTER IN INDIA
QR CODE READING SYSTEM
SERVO MOTOR
CCD CAMERA DETECTION

Technical Specification

Model No.	: A6 PLUS / A6 PRO PLUS
Media way	: Auto Paper Feeding
Control Panel	: 4.3" Full touch Screen
Driver	: Servo Motor
Maximum Cutting area	: 483mmX329mm Width
Maximum Cutting Speed	: 1200+
Cutting Force	: 10-1000g (digital adjustment)
Mechanic Precision	: 0.025mm
repeatable Precision	: <0.025mm
Plotter instructing	: all type diameter 11.4mm plotter pen
Interface	: USB/U disk/ Serial Port
Power Supply	: AC220V / 110V, 50Hz
Power Consumption	: <80W
Operating environment	: Imported hardness alloy steel blade Temperature : 5-35°C
Package size	:
Gross Weight	: 70 Kg



TM

Model
A6 PRO
PLUS

High Speed with
Servo Motor



SPEED 1200+

DIGITAL DIE CUTTER

Technical Specification

Model name	: SC 2310
Positioning sensor type	: Digital camera (CCD)
Control panel	: 4.3 inch capacitive touch screen
Number of tool holders.	: Double tool holders
Sheet feeding method	: Up to 100 pcs depends on tickness of the paper
	: Round marker, corner marker, QR code
Maximum cutting size	: 330mmX483mm
Cutting speed	: 10-1200
Cutting force	: 0-900
Mechanical resolution	: About 5mm ² (Depend on varaible material and graphics)
Repeat precision	: HPGL 0.025mm
Connectivity	: USB, LAN, WIFI, U disk
Working power	: Maximum 150W
Voltage and current	: 100VAC-240VAC, 50/60 Hz, Maximum
Operation environment	: Temperature +5°C to +35°C (41°F-95°F)
	: Humidity : 30% - 75%RH (Non-Condensing)
Actual dimensions	: L719mm×W503mm×H436.5mm.
NW/GW	: 37±1kg/56±1kg

Half Cut, Full Cut & Crease

Model
SC 2310



Half Cut, Full Cut & Crease

Model
ASC 2301



Technical Specification

Model name	: ASC 2301
Cutting control system	: High-power brushless servo motor
Control panel	: 7 inch capacitive touch screen
Number of tool holders	: Double tool holders
Blade types	: Blade, creasing tool and pen
Media hold method	: Vacuum suction
Maximum cutting size	: X:530mm Y:740mm
Minmum cutting size	: X:330mm Y:270mm
Cutting speed	: 15-1050
Mechanical resolution.	: 0.02mm
Cutting media types	: Self-adhensive paper, cardstock, PVC, PET etc.
Connectivity	: USB/U disk/LAN/WiFi
Software and compatibility	: Professional Digital Cut software Cut Studio CorelDRAW/Illustrator Plug-in
Working power	: Maximum 320W
Voltage and current	: 100VAC-120VAC 50/60Hz, Maximum current 6.BA 200VAC-240VAC 50/60Hz, Maximum current 3.4A
Actual Dimensions	: L1110mm×W860mm×H1200mm
Gross/Net Weight	: 223±10kg/171±10kg

This parameter is subject to change without prior notice. The company reserves the right of final interpretation

FLATBED DIGITAL DIE CUTTER



Model F4560

Model F6090 also Available

Camera for auto Contour Cutting.

Technical Specification

Max. Cutting Size	: 600*450 mm
Work Mode	: Vacuum Adsorbing
Control Panel	: Touch Screen
Heads	: Double heads
Cutting Precision	: 0.01 mm
Repeat Precision	: 0.05 mm
Max. Moving Speed	: 800 mm/s
Max. Cutting Speed	: 700 mm/s
Max. Force	: 2000g
Connector Interface	: U Disk/Wifi/USB Cable
Power	: <100W
Working Environment	: 5-35°
Gross Weight	: 180 kg

PK Automatic intelligent Cutting System



Models :
PK0604
PK0604 PLUS
PK0705
PK0705 PLUS

Cutting Head Type	PK		PK PLUS	
	PK 0604	PK 0705	PK 0604 PLUS	PK 0705 PLUS
Machine Type	600x400 (MM)	750 X 530 (mm)	600x400 (MM)	750 X 530 (mm)
Cutting Area (LxW)	2350x900x1150 (MM)	2600 X 1000 X 1150 (mm)	2350x900x1150 (MM)	2600 X 1000 X 1150 (mm)
Flooring Area (LxWxH)	Universal Cutting Tool, Creasing Wheel, Kiss Cut Tool		Oscillating Tool, Universal Cutting Tool, Creasing Wheel, Kiss Cut Tool	
Cutting TOOL	Car, Sticker, Sticker, Card Paper, PP Paper, Reflective Material		KT Board, PP Paper, Foam Board, Sticker, Reflective Material, Card Board, Plastic Sheet, Corrugated Board, Grey Board, Currugated Plastic, ABS Board, Magnetic Sticker.	
Cutting Material	2 MM		6 MM	
Cutting Thickness	Vacuum System			
Media	1500 mm/sec			
Max. Cutting Speed	±0.1 mm			
Cutting Accuracy	PLT DXF HPGL PDF EPS			
Data format	220 V ± 10% 50Hz Single Phase			
Voltage	4KW			
Power				

DOUBLE HYDRAULIC PAPER CUTTING MACHINES



Model JH520

Features

- Infrared grating safe
- Double Guide Device
- Mechanical foot Pedal
- Heavy Duty design with thick plate

Technical Specification	JH520	JH490
Max. Cut Size	: 520mm	490mm
Min. Cut Size	: 45mm	45mm
Max. Cut Height	: 80mm	80mm
Cutting Precision	: ±0.3mm	±0.3mm
Mode of Clamp	: Hyd. + Mechanical	Hyd. Mechanical
Mode of Cutting	: Hydraulic	Hydraulic
Mode of Pushing	: Motor pushing	Motor pushing
Program	: Program (100*7)	Program (100*7)
Display	: 7" Touch Screen	7" Touch Screen
Power	: AC 220V, 50Hz	AC 220V, 50Hz
Load	: 2.2KW	2 KW
Gross Weight	: 425Kg	410Kg
Dimension	: 1240 x 980 x 1470	1240 X 920 X 1470

Features

- Good Quality touch screen
- Double Guide Device
- Mechanical hydraulic system
- Heavy Duty Casting Body.
- Heavy duty knife holder

Technical Specification	JH670+	JH530
Max Cut Width	: 670mm	530 mm
Min Cut Depth	: 45mm	45mm
Max Cut Height	: 80mm	80mm
Cutting Precision	: ±0.3mm	±0.3mm
Mode of Clamp	: Hyd. Mechanical	Hyd. Mechanical
Mode of Cutting	: Hydraulic	Hydraulic
Mode of Pushing	: Motor pushing	Motor pushing
Program	: Program (100*7)	Program (100*7)
Display	: 10 inches	7 inches
Power	: AC 220V, 50Hz	AC 220V, 50Hz
Gross Weight	: 650Kg	550 Kg



Model JH 530

Features

- Suitable for thick paper cutting. / Infrared for safety operation
- Man-machine interface design, 100 groups*96 cuts program.



Technical Specification	H520TV7	H500T
Max Cut Length	: 520mm	500mm
Min Cut Length	: 30mm	30mm
Cutting Thickness	: 80mm	80mm
Cutting Precision	: ±0.2mm	±0.2mm
Mode of Clamp	: Hydraulic + Mechanical Pedal	Hydraulic + Mechanical Pedal
Display	: 7" Touch Screen	7" Touch Screen
Front Platform	: 10mm Hard Aluminium Bed	3 mm Chrome Plated steel plate
Program	: 100x96 cuts	100x96 cuts
Power	: 220V 50 Hz, 2.0 KW	220V 50 Hz, 1.8 KW
Weight	: about 405 Kg	about 380 Kg
Machine Size (mm)	: 1280 X 1010 X 1430	1260 X 990 X 1410

DOUBLE HYDRAULIC PAPER CUTTING MACHINES

Features

- Thickened whole structure, thickened the blade carrier, more durable.
- Thicken aviation aluminium plate with ball table, easy feeding the paper.
- Push book platform can be folded, convenient transportation

Technical Specification

Max Cut Length	: 670 mm
Min Cut Length	: 30 mm
Cutting Thickness	: 80 mm
Cutting Precision	: ±0.2 mm
Mode of Clamp	: Hydraulic + Mechanical Pedal
Display	: 7" Touch Screen
Program	: 100x96 cuts
Front Platform	: 10mm Hard Aluminium Bed
Power	: 220V 50 Hz, 2.3 KW
Weight	: about 490 Kg
Machine Size (mm)	: 1400 X 1150 X 1460



Features

- Three phase 220V 2.2KW frequency conversion hydraulic system is adopted (internal converted)
- Quiet Mode: Very less cutting sound

Technical Specification

Max. Cutting Size	: 530X530 mm
Min. Cutting Size	: 25 mm
Max. Cutting Thickness	: 100 mm
Cutting Accuracy	: ±0.2mm
Paper Press Mode	: Hydraulic
Paper Cutting Mode	: Hydraulic
Paper Pushing Mode	: Programmable Step
Display	: 10" Touch Screen
Infrared Protection	: YES
Total Power	: 2200W
Power	: 220V 50 Hz (Single Phase)
Machine Size	: 1150X890X1450 mm
Machine Weight	: 425 Kg.



Technical Specification Very Durable Machine

Max.Cutting Width	: 520mm
Min.Cutting Width	: 30mm
Max.Cutting Thickness	: 80mm
Cutting Accuracy	: 0.2mm
Clam Mode	: Hydraulic
Push Mode	: Program Control
Display	: 10.1" Touch Screen
Power Supply	: 220V, single Phase
Power	: 1800W
Machine Size	: mm
Machine Weight	: Kg



DOUBLE HYDRAULIC PAPER CUTTING MACHINES

Features

- Returning knife turns off main motor, saving 50% electricity.
- Faster cutting speed, high accuracy and lighter sound.

Technical Specification

Max. Cutting Size	: 500x500 mm
Min. Cutting Size	: 30 mm
Max. Cutting Thickness	: 100 mm
Cutting Accuracy	: ±0.2 mm
Paper Press Mode	: Hydraulic + Mechanical Pedal
Paper Cutting Mode	: Hydraulic
Display	: 7" Touch Screen
Power	: 2.2KW 220V±10% 50Hz
Machine Size	: 910X1270X1450 mm
Machine Weight	: 400 Kg.

Model
CP 5010



ELECTRIC PAPER CUTTING MACHINES

Features

- Overall frame design, no shaking during cutting, more stable use
- The whole machine adopts four-wheel positioning, which is easy to move and fix
- CE Standard Design

Technical Specification

	CM460X	CM50M
Max Cut Size	: 460 mm (18")	500 mm (19.6")
Min Cut Size	: 25 mm	25 mm
Cutting Thickness	: 60 mm	80 mm
Cutting Accuracy	: ±0.3 mm	±0.2 mm
Clamp Mode	: Program control	Electric
Push Mode	: Electric	CNC
Infrared Light	: Yes	YES
Display	: 7" Touch Screen	7" Touch Screen
Power Supply	: AC220V, 50Hz	220V, 50Hz
Power	: 700W	750W
Machine Size	: 930 X 740 X 1300mm	990 X 790 X 1200 mm
Machine Weight	: 150 kg	200 kg

Model
CM50M



MANUAL PAPER CUTTING MACHINE

Features

- Heavy Duty Professional Rim Cutter
- Metal Base
- Max. 400 sheet Capacity.

Technical Specification

Cutting height	: 40mm
Machine size(inch)	: 26X24X7.5 mm
Weight	: 19kg
Base material	: Metal
Maximum cutting Thickness	: 40mm
Maximum cutting size	: 17"
Machine Weight	: Kg

Model
858



THERMAL LAMINATION MACHINES

Technical Specification

Paper Width Max.	: 350mm
Paper Length	: 110-700mm
Lamination Width	: 330mm
Paper Thickness	: 80-400gsm
Lamination Speed	: 240m/h
Feed Way	: Manual
Display	: LCD
Max Film Roller	: 210mm
Manual slit	: Yes
Heat Roller	: 2
Double side	: Yes
Perforate	: Yes
Anti curl level	: 18
Machine Size	: 730 x 640 x 545 mm
Net Weight	: 48kg
Voltage	: 220V±10%

**Model
F350A**

Old is Gold



THERMAL LAMINATION & FOIL TRANSFER



**Model
EL380 BN/P**

Also Available with Rewinder

Technical Specification

Size	: 380 mm
Max. Lami. Width	: 365 mm
Lami. Thickness	: 80-400 gsm
Lamination	: Both Side
Laminating Speed	: 0-5 Meter/Min.
Warm Up Time	: 5 minutes
Number of Rollers	: 4 Rollers
Heating Method	: Hot Roller
Core Size	: Standard 3 inch
Laminating Temp.	: 70 – 130°
Power Supply	: AC 220V/ 50 Hz
Power	: 0.9KW (1), 1.9 Kw (2)
Dimensions	: 720 x 610 x 480 mm
Machine Weight	: 45 Kg

EL380 BN/P

Also Available
Model
BR/P

EL520 BN/P

Size	: 520 mm
Max. Lami. Width	: 500 mm
Lami. Thickness	: 80-400 gsm
Lamination	: Both Side
Laminating Speed	: 0-6 Meter/Min.
Warm Up Time	: 5 minutes
Number of Rollers	: 4 Rollers
Heating Method	: Hot Roller
Core Size	: Standard 3 inch
Laminating Temp.	: 70 – 130°
Power Supply	: AC 220V/ 50 Hz
Power	: 1.25 KW(1), 2.2 KW (2)
Dimensions	: 720 x 610 x 480 mm
Machine Weight	: 70 Kg

Technical Specification

Film Width	: 340 mm
Max. Film Thickness	: 2 mm
Die Speed	: 0-3/min
Max. Heating Temperature	: 160 C°
Display Screen	: LCD
Diameter of Rubber Roller	: 75 mm
Heating Method	: Infrared Internal heating
Heating Power	: 1600 W
Motor Power	: 80 W
Power Supply	: 220V/50Hz
Machine Net Weight	: 60 Kg



**Model
SRL 360**

MARVEL PRINT PACK SOLUTIONS

Heavy Duty & Reliable Range of Thermal Lamination Machine

THERMAL LAMINATION & FOIL FUSER

Technical Specification

	35E	49E
Max Laminating Width	: 350 mm	490 mm
Max Laminating Thickness	: 1 mm	1 mm
Lamination Speed	: 0~8m/min	0~8m/min
Lamination	: Both side	Both side
Hot Laminating Temperature	: 160°	160°
Display	: LCD	LCD
Steel Roller Diameter	: 100 mm	100 mm
Rubber Roller Diameter	: 75 mm	75 mm
Heating Method	: Infrared Heating	Infrared Heating
Power	: 1600 W	2000 W
Anti curl Function	: Yes	Yes
Motor Power	: 80 W	150 W
Power Supply	: AC 220, 50Hz	AC 220, 50Hz
Machine Size	: mm	mm
Machine Weight	: Kg	Kg

Model
35E



Manual Feed with Rewinder.

THERMAL LAMINATION MACHINE



Model
35EP

Manual Feed Auto Cut

Technical Specification

Max Laminating Width	: 350 mm
Max Laminating Thickness	: 2 mm
Lamination Speed	: 0~6m/min
Lamination	: Single side
Hot Laminating Temperature	: 160°
Display	: LCD
Steel Roller Diameter	: 110 mm
Heating Method	: Infrared Heating by Hot air
Power	: 1600 W
Anti Curl Function	: Yes
Auto Cut Function	: Yes
Motor Power	: 80 W (Single Phase 220V)

Technical Specification

Max Laminating Width	: 350 mm
Max Laminating Thickness	: 1 mm
Lamination Speed	: 0~6m/min
Lamination	: Single Side
Hot Laminating Temperature	: 160°
Display	: LCD
Steel Roller Diameter	: 110 mm
Heating Method	: Infrared Heating By Hot Air
Power	: 1600 W
Auto Curl Function	: Yes
Anti Pull Off Function	: Yes
Motor Power	: 80 W
Power Supply	: Ac 220, 50Hz
Auto Cut	: Yes
Auto Feed	: Yes

Model
35A



Super Mirror Steel Roller
Auto Feed, Auto Cut

HYDRAULIC THERMAL LAMINATOR



Technical Specification

Lamination	: Both Side
Max.Laminating Width	: 350mm
Laminating Speed	: 0-6m/min
Upper Roller Diameter	: 130mm
Lower Roller Diameter	: 75mm
Max.Heating Temperature	: 160 degree celcius
Heating Method	: Infrared internal heating
Heating Power	: 2500W
Motor Power	: 180W
Power Supply	: AC220V,50/60Hz
Machine Weight	: 180kg

HYDRAULIC THERMAL LAMINATOR FOR COMMERCIAL USE


Technical Specification

Max Laminating Width	: 520 mm
Max Laminating Thickness	: 6 mm
Lamination Speed	: 0~15m/min
Lamination	: Single side
Hot Laminating Temp.	: 160°
Display	: LED
Press Mode	: Hydraulic
Paper feeding way	: Conveyor feed
Steel Roller Diameter	: 200 mm
Trimming function	: Yes
Perforating function	: Yes
Anti curl Function	: Yes
Automatic winding	: Yes
Power	: 3900 W
Motor Power	: 400 W
Power Supply	: AC 220V, 50Hz, AC motor

Model 520Y



LABEL CUTTER SQUARE STRAIGHT HALF CUT, CREASING & PERFORATION (3 IN 1) WITH AUTO FEEDER

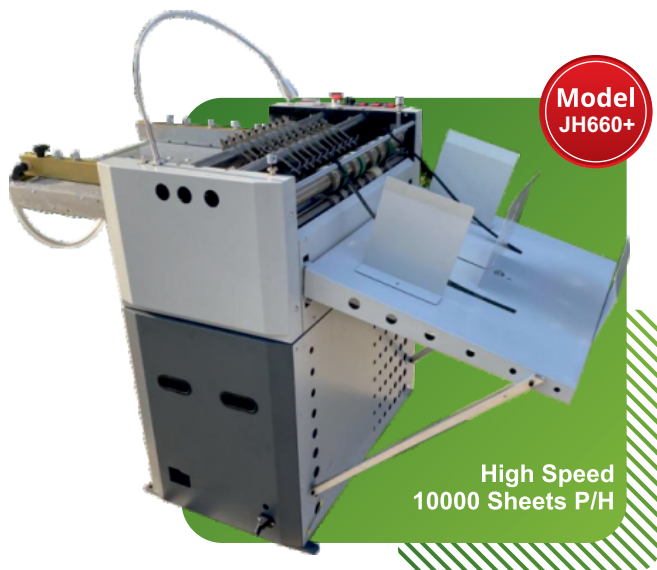

Model JH660+

High Speed
10000 Sheets P/H

Features

- High Speed paper feeding applies to the laminated adhesive sticker, transparent adhesive sticker and paper face adhesive sticker.

Technical Specification

Model	: JH660+
Max. Paper Size (mm)	: 620 x 470
Min. Paper Size (mm)	: 90 x 120
Sticker Knife	: Straight Knife
Paper Weight	: 50 – 350g
Half Cutting Gap	: 2 mm
Min. Half Cutting Gap	: 7mm
Speed	: 130m/min
Paper Feeding Way	: Air Suction Type
Power	: 220V / 50Hz, 1050W
Weight	: 160kgs
Dimension	: 1400 x 870 x1100 mm
Standard Configuration	: 20 Straight Knives, 3 Creasing Moulds, 1 Perforating Knife



Model SCT 20

Technical Specification

Sheet Size	: up to 20 inches width
Sheet Feeder	: Top Sheet Friction Auto Feeder
Paper Thickness	: 60gsm-400 gsm
Roller	: Special Creasing Roller to prevent cracking of paper
Design	: Industrial Heavy Duty
Space Required	: Very Less
Speed Control	: Adjustable
Motor	: 0.5 HP 220-240V DC
Table	: OPTIONAL
Rotary Cutting Blades	: 7pcs, can be added more
Rotary Creasing	: 2pcs, can be added more
Rotary Perforation	: 1piece, can be added more
Machine Size	:
Machine Weight	:

LABEL CUTTER SQUARE STRAIGHT HALF CUT, CREASING & PERFORATION (3 IN 1) WITH MANUAL FEEDER



Model 470 B

Technical Specification

Model No.	: 470 B
Usage/application	: Half Cutting / Creasing / Perforating
Automation Grade	: Semi Automatic with Speed Controller
Feeding Mode	: Manual
Voltage	: 220V 110V 50HZ 90W
Creasing Paper Width:	490mm
Creasing Wheel	: 2
Half Cutting Blade	: 5
Perforating Wheel	: 1
Machine Weight	: 13.900 kgs approx
Machine Dimension	: 670x240x300 mm approx

PERFECT BINDING MACHINES

Technical Specification

Max. Binding Length	: 460 mm
Max. Binding Thickness	: 60 mm
Glue Melt Time	: about 20 mins
Binding Speed	: 300 book/hour
Milling Cutter	: 18 teeth sun Milling Cutter + Small Milling Cutters
Glue Roller	: Spine Glue + Independent side Roller
Glue Type	: Manual & Automatic+Fast mode
Display Mode	: 7 inches touch screen
Spine Forming method	: Electric touch screen adjustment
Paper Milling	: Two Fold
Power Supply	: 220V Single Phase
Power	: 1400 W
Machine Size	: 1610X480X960 mm
Gross weight	: 235 kg

**Model
60HCA3**

Strong Structure



With Side Glue

Technical Specification

55H-A4

55H-A3

Max. Binding Length	320 mm	420 mm
Max. Binding Thickness	55 mm	55 mm
Glue Melt Time	Less than 20 mins	Less than 20 Mins.
Binding Speed	250 books/hour	280 books/Hr.
Milling Cutter	10 teeth sun milling- small milling cutters	10 teeth sun milling- small milling cutters
Glue Roller	Single Roller	Single Roller
Power Supply	220V	220V
Glue Type	Manual & Automatic	Manual & Automatic
Paper Milling	Two-fold	Two-fold
Spine forming- adjustment Method	Classic knob	Classic knob
Power	1000W	1000W
Machine Size	1080X460X950 mm	1300X490X970mm
Weight	Net : 130 kg, Gross 160 kg.	Net : 150 Kg., Gross 185 Kg.

Model

**55H-A4
55H-A3**



**Model
BM 300L**

With Side Glue

Technical Specification

Max. Binding Length	: 320 mm
Max. Binding Thickness	: 60 mm
Glue Melt Time	: about 20 mins
Binding Speed	: 320 book/hour
Milling Cutter	: Small Milling Cutter + Sun Milling Cutter
Glue Roller	: Spine Glue Roller + Side Glue Roller
Glue Type	: Manually & Automatic+Fast mode
Display Mode	: 7 inches touch screen
Spine Forming Adjustment Method	: Knob with digital display
Power Supply	: 220V Single Phase
Power	: 1200 W
Paper Milling	: Two-fold
Machine Size	: 1280X500X980 mm
Gross weight	: 190 kg

SPIRAL WIRO BINDING MACHINE 2 IN 1

Technical Specification

Binding Form	: WIRO 3:1 and Spiral 4:1
Power	: Manual
Punching Capacity	: 25 sheets (80g paper per manual punch)
Binding Capacity	: 140 sheets for wire / 300 sheets for spiral
Punching Width (mm)	: Below 340mm
Number Of Holes	: 40 (3:1) for wire or 54 (4:1) for spiral
Adjustable Margin (mm)	: 2.5, 4.5, 6.5
Qty. of Movable Cutter	: ALL
Net Weight (kg)	: 28.5
Size of Machine (cm)	: 48 x 40.5 x 22



DOUBLE WIRO BINDING MACHINE 2 IN 1



Technical Specification

Wire	: Wiro (3:1) & (2:1)
Power	: Manual
Use	: Wire bind Machine
Punching Capacity	: 25 sheets
Binding Capacity	: 140/300 sheets
Punching Width(mm)	: Below 340mm
Number of Holes	: 27(2:1) & 40 (3:1)
Adjustable Margin(mm)	: 2.5,4.5,6.5
Quantity Of Movable Cutter	: ALL
Net Weight	: 25.5 kg
Size of Machine(cm)	: 48 x 40.5 x 22

ALL IN ONE HEAVY DUTY PUNCHING MACHINE

Features SPIRAL | WIRO | CALENDER

- Easy operation by foot pedal
- Exchangeable punching dies for all kinds of punching pattern
- Change dies is easy and fast , take 5 minutes.
- **NOTE : With Machine Only One Die**

Technical Specification

Punching Width	: 430 mm
Punching Thickness	: 4 mm
Punching Speed	: 150 times/minute
Motor Power	: 220V/50Hz, 1500W, 1 Phase
Weight	: 190Kg

Die Chart



Code	Pitch	Diame ter	Holes	Hole distance	Die Pattern Style
SUPU450-01	14.25mm (COMB)	3x8mm (0.112x0.315)	29	14.25	[Diagram showing 29 rectangular holes in a row]
SUPU450-02	2:1	3.5x5.5mm (0.138x0.217)	33	12.7	[Diagram showing 33 rectangular holes in a row]
SUPU450-0	2:1	5.5x5.5mm (0.217x0.217)	33	12.7	[Diagram showing 33 square holes in a row]
SUPU450-04	3:1	5mm (0.157)	50	8.47	[Diagram showing 50 circular holes in a row]
SUPU450-05	3:1	4x4mm (0.157x0.157)	50	8.47	[Diagram showing 50 square holes in a row]
SUPU450-06	3:1	4x4mm (0.157x0.157)	48	8.47	[Diagram showing 48 square holes with a semi-circular cutout in the middle]
SUPU450-07	3:1	5mm (0.157)	48	8.47	[Diagram showing 48 circular holes with a semi-circular cutout in the middle]
SUPU450-08	5.287mm	5x4mm (0.197x0.157)	67	6.287	[Diagram showing 67 rectangular holes in a row]
SUPU450-09	6mm	5x3.6mm (0.197x0.142)	71	6	[Diagram showing 71 rectangular holes in a row]
SUPU450-10	6mm	4mm (0.157)	71	6	[Diagram showing 71 circular holes in a row]
SUPU450-11	5mm	3.2mm (0.126)	84	5	[Diagram showing 84 circular holes in a row]
SUPU450-12	80 mm	6mm (0.236)	2/4	80 mm	[Diagram showing 2/4 circular holes with 80mm spacing]
	108 mm		3	108 mm	
SUPU450-13					[Diagram showing a cross-section of a hole with dimensions 20mm and 3mm]

CREASING / PERFORATION MACHINES

Manual Creaser



**Model
H460**

Technical Specification

Width	: 455 mm
Creasing depth	: 1 mm
Creasing Way	: Manual
Gross Weight	: 5 kg
Machine Size	: 690 X 490 X 125mm

Features

- Digital control processing position.
- Multifunctional design: with two production functions of creasing and perforating die.
- Wide paper range: 340mm processing width, 900mm paper length, 40-450g paper thickness
- 32 times of creasing of one sheet.
- Can be used for art paper, laminating paper, and so on.

Technical Specification

	NC350	NC353
Max Paper Size	340*900mm	340*900mm
Min Paper Size	50*90mm	50*90mm
Creasing Paper Thickness	60-300gsm	60-300gsm
Perforating Paper Thickness	150-250 GSM	150-250 GSM
Precision	0.2mm	0.2mm
Speed	2400 sheets/Hr. (A4, creasing one line)	3500 sheets/Hr. (A4, creasing one line)
Creasing Times of One Sheet	0-32 times	0-32 times
Cabinet	Optional	Optional
Operating Mode	Digital	Digital
Power Supply	220V/50Hz 150W	220V/50Hz 150W
Dimensions	620*620*520mm	620*620*520mm
Machine Weight	42Kg.	46Kg.



**Model
NC350
NC353**

Semi Auto Feeder

CREASING / PERFORATION MACHINE WITH AUTO FEEDER

Technical Specification

	NC350A	NC353A
Paper weight (creasing)	60gsm-300gsm	
Paper weight (perforation)	150-250 GSM	
Paper type	Coated paper, Art paper, Laminated paper	
Working speed	3000 sheets/H	4000 sheets/H
Feeding	Up Suction	
Paper size	148X138mm ~ 340X660mm	
Creasing accuracy	0.3 mm	
Min. space between lines	1 mm (Creasing)	
Max creasing per pass	32	
paper Counter	Positive & Negative Counting	
Cabinet	YES	
Power	200W	
Machine size	1550*560*480mm	
N.W/G.W	78/85 Kg.	90/105KG
packaging size	760*580*630mm	

**Model
NC353A**



Full Auto Feeder

PAPER PUNCHING MACHINE

Technical Specification

Number of Punching Bits	: 1
Punch Thickness	: 50 mm
Punching Margin	: 5-70 mm
Table Size	: 230 mm X 300 mm
Maximum Punching	: A4
Punch Diameter	: 3-9 mm
Punch Size Card	: 30-50 mm
Punching Method	: Manual
Power Supply	: 220V
Motor	: 250V
Motor Speed	: 2800 rpm
Weight	: 22 kg
Dimensions	: 425 X 300 X 470 mm

Model
50B



EYELET PUNCHING MACHINES

**EYELET DROP AUTOMATICALLY ONE BY ONE
SAVE TIME & EFFORTS.**

Technical Specification

Application	: Flex Banner
Eyelet Size	: 10mm
Capacity	: 30-50 pcs eyelets per minute
Machine Type	: Semi – Automatic
Power Source	: Mechanical
Key Selling Point	: Energy Saving
Material	: Carbon Steel
Machine Size(cm)	: 46 x 36 x 32
Function	: Punching and Press
Weight	: 8 kg

Also Available in 8mm & 6 mm

Model
10mm

Model
8mm

Model
6mm



EYELET PUNCHING MACHINES



Model
JYSC4

Machine Available in 3, 4 & 5.5mm


Technical Specification

Uses	: Suitable for making eyelet punch in Tags Labels , Danglers , File
Binding Thickness(mm)	: Less than or equal to 3 mm
Eyeleting Diameter	: 3, 4, 5.5 mm (with Machine any one Die)
Working length ways travel	: 165 mm
Machine Type	: Semi – Automatic
Driven Type	: Mechanical
Automatic Grade	: Manual
Speciality	: Rust resistant
Performance	: Optimum
Finishing	: Polished
Machine Dimensions(inch)	: 17 x 9 x 15
Weight	: 14kg

WIRE STAPLE MACHINE

Technical Specification

Binding Speed	:	0-80times/Min
Wire No.	:	24,25,26
Thickness	:	0.2-5mm
Power	:	220V/50Hz
Weight	:	30Kg

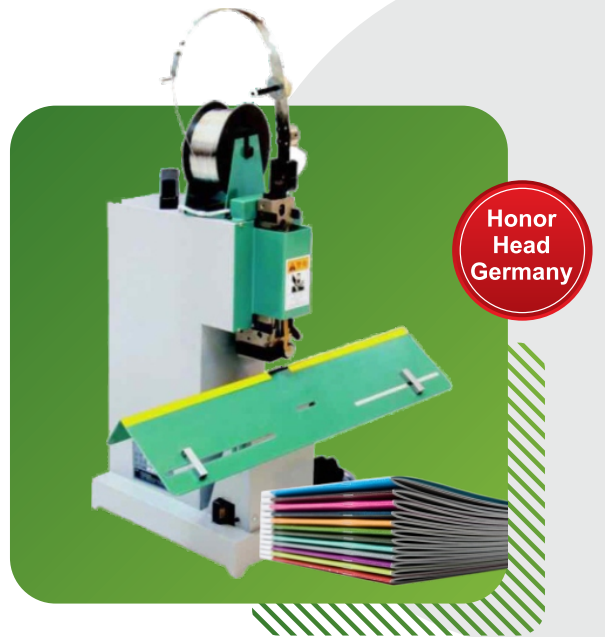

ROUND CORNER CUTTER MACHINE WITH 7 DIES



Features

- Change one die fast in 1.5 seconds
- Works with Paper, Leather card, tag etc.
- Ideal for making the Album, Menu, Photo, Book, Tender, Brand Label

Technical Specification

Capacity	:	80mm
Speed	:	56 Strokes/Min.
Available Dies	:	Built in 7 dies (R2,R3,R4,R5,R6,R7,R8)
Power	:	220V/0.12KW
Motor	:	1400 circles/min
Machine Size	:	435 x 350 x 750mm

HEAVY DUTY PNEUMATIC ROUND CORNER & ANGLE CUTTER

Features

- Works with Paper ,Leather card, tag etc.
- Ideal for making the Album, Menu, Photo Book, Tender, Brand Label
- One Die Only With Machine

Technical Specification

Cutting Thickness	:	120 mm
Working Platform Size	:	640X300 mm
Weight	:	180 kg
Dimensions	:	640X550X1300 mm



GLUING MACHINE

Technical Specification		RJS700
Width	:	700 mm
Thickness	:	80 - 400g
Speed	:	25m/min
Type	:	Hot and cold
Power	:	0.37/3.37KW
Certification	:	CE
Driven Type	:	Electric
Glue Tray	:	2
Machine Size	:	
Machine Weight	:	

Model
RJS700
Hot & Cold

Paper / Card Board / Leather




PNEUMATIC V-GROOVING MACHINE WITH CORNER CUTTER

Technical Specification	
Grooving Angle	: 80-135 Degree
Workable Width	: 700mm
Thickness of Board	: 0-8mm
Speed	: 0.5s
Grooving Accuracy	: 0.05mm
Weight	: 80kg
Dimensions	: 1200*550*950mm

MODEL
DG700VP



BOX CORNER PASTING MACHINE

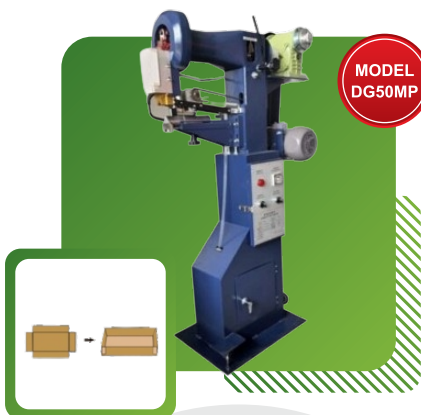

MODEL
DG50MP

Technical Specification	
Rigid Box Size	: L50mm-Unlimited W50mm-Unlimited H10mm-Unlimited
Output Speed	: 10-30pcs/min
Voltage/Power	: AC220V/50Hz/0.4kw
Dimesions	: 800mm x 400mm x 1400mm
Weight	: 150kg


DIGITAL FOIL TRANSFER

Technical Specification


Model No.	: 360 A/B/C
Computer system requirement	: Windows systems: XP, Win7, Win 8, Win 10, other system has not verified
Software requirement	: Most of softwares, Coreldraw, photoshop, adobe illustrator
Connecting interface	: USB 2.0
Printing method	: Thermal transfer
Operating temperature	: 5°C to 40°C
Printing material	: Smooth and flat materials: paper, invitation cards, PVC, sticker (leather is not suitable, too soft, may be rolled in when feed in automatically)
Max. Feeding size	: width 350mm, unlimited feeding length, thickness 600g
Max printing Width	: 252mm, unlimited printing length
Max printing thickness	: 20mm-50mm/s
Service life of printing head	: 150,000 meters high precision thermal Japan Rohm print head
Power	: 400W
Voltage	: AC 110-240V, 50/60HZ
Accessories	: USB flash disk (user manual & Video), power line, USB cable.



**Paper Manual Feed
&
Foil Full Paper Length Will be Used**

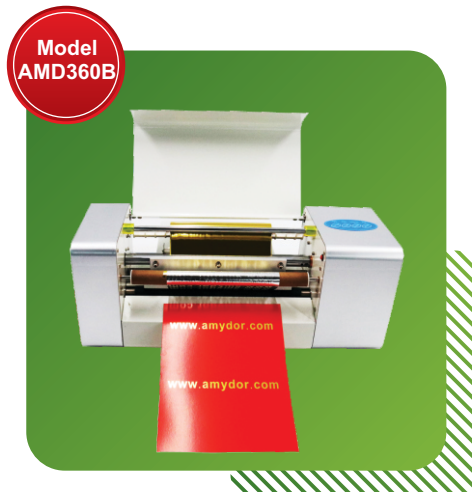

**Paper Manual Feed
&
Foil Design Length Will be Used**

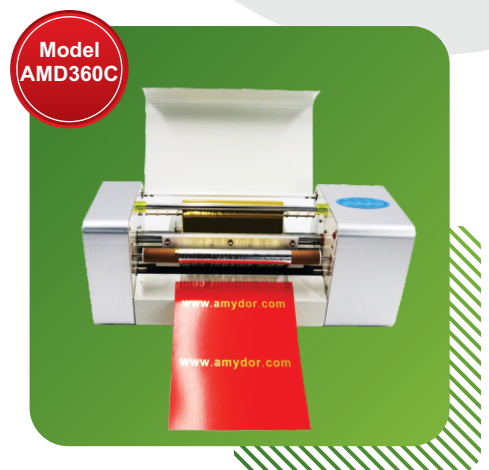

**Paper Auto Feed
&
Foil Design Length Will be Used**



**Fully Automatic
A3+ Print Size**

Technical Specification

Computer system	: Windows system
Design software	: CorelDraw, Adobe Illustrator, etc.
Connection interface	: USB
Application	: Smooth and flat materials paper, PVC, invitation card, certificate
Max. material width allowed	: A3 plus width 33cm, unlimited length
Max. material thickness	: 600 grams
Max. printing size	: Width 30cm, unlimited length
Printing speed	: 360pcs one hour (full printing on A4 paper for example)
Printer resolution	: 300dpi
Lifetime of printing head	: 150,000 meters, means printer can use about 3000 rolls foil if one roll 50 meters long
Power & Voltage	: 400W 100-240V, as customer's needed
Warranty	: three months for printing head one year for other parts of printer.
Packing size	: 74cm 46cm 34cm, 0.12CBM
G.W. & N.W.	: 22kg, 21kg

DIGITAL FOIL TRANSFER



**Model
AMD360E**

For Gumming Label Sheets

Technical Specification

OS system required	: Windows 7, 8, 9 etc
Software supported	: Most of design software, such as Photoshop, CorelDraw, Adobe Illustrator, etc
Connecting interface	: USB
Working method	: heat transfer printing
Screen frame size	: 600 mm* 900 mm, or customized
Maximum Print Width	: 300 mm
How long to make a screen	: About 100 seconds[A2(420 mm* 594 mm)]
Storage capacity	: 128 MB
Printing size	: Min: 10 mm(L)_ 10 mm(W) Max: 600 mm(L)_ 300 mm(W)
Power & Voltage	: 150 W & AC 110- 240 V, 50- 60 Hz(As required)
Resolution	: 300 dpi
Warranty	: 1 year since sold, printing head is not included unless the quality problem
Packing size	: 920 mm* 320 mm* 380 mm
Gross weight	: 35 kg

Technical Specification

Computer system requirement	: Windows systems: other system has not verified
Software requirement	: Most of softwares, Coreldraw, photoshop, adobe illustrator, etc.
Connecting interface	: USB
Printing medium	: Thermal printing
Operating temperature	: Boxes, paper, cardboard, adhesive stikcer, plastic board, PET, PVC, PU, leather, film frosted, PVC acrylic, board, etc.
Max feeding width	: Unlimited
Max feeding thickness	: 350mm
Max printing size	: 57*160mm, 57*210mm, 57*240mm
Printing speed	: 20mm-50mm/s
Service life of printing head	: 150,000 m
Power & Voltage	: 150W & AC 110-240V, 50/60HZ (as needed)
Warranty time	: 1 year since sold and printing head is not included unless the quality problem.
Package size	: 63cm 42cm 71cm
Gross Weight	: 40Kg/29Kg



**Model
8025D**

Technical Specification

Computer system requirement	: Windows systems: XP, Win 7, Win 8, Win 10, other system has not verified
Software requirement	: Most of softwares, Coreldraw, photoshop, adobe illustrator
Connecting interface	: USB 2.0
Printing method	: Thermal printing
Operating temperature	: 5°C to 40°C
Printing material	: Smooth and flat: books, book cover, papers, cardboard, adhesive sticker, PET, PVC, PU, leather, film, acrylic board, etc.
Feeding size	: Unlimited
Max feeding thickness	: 30mm
Max. automatic printing width	: 250mm
Max. automatic printing length	: 300mm
Printing speed	: 20mm-50mm/s
Service life of printing head	: 150,000 meters high precision thermal Japan Rohm print head
Power	: 150W
Voltage	: AC 110-240V, 50/60HZ (as needed)
Accessories	: USB flash disk (installation driver & user video), power line, USB cable

**Model
AMD3025**

Head and Platform both auto moving



DIGITAL BUSINESS CARD & TAG PRINTER

Technical Specification

Computer system	: Windows system
Max print width	: 5.4cm, 2"
Material width	: 2.5cm 6cm (1"-2")
Material length	: 5cm 18cm
Material thickness	: 100grams 400grams
Print resolution	: 600dpi
Printing speed	: max. 150mm/s (6"/second)
Connection interface	: USB
Power supply	: 100-240V, can be customized
PowerWarranty	: 125W
one year except print head	
Packing size	: 52cm*31cm*39cm, 0.06CBM
G.W. /N.W.	: 12kg / 11kg
Consumable	: Foil (gold, silver, red, blue, black)
Foil size	: 6cm*50m/roll; 6cm*100m/roll

Model
AMD41F

Digital Business Card Printer



Garment tag foil printer

Model
AMD41D



Technical Specification

Computer system	: Windows system
Design software	: CorelDraw, Adobe Illustrator, etc.
Max. print width	: 10.4cm(1280 dots), 4"
Material width	: 2cm 12cm (0.8"-4")
Material length	: 4cm 22cm
Material thickness	: 100grams 500grams
Print resolution	: 300dpi
Dot density	: 118 dots/mm
Printing speed	: max. 120mm/s
Feeding method	: 180° automatic feeding of material
Interface	: USB 2.0 full speed
Power supply	: 100-240V, as customer's needed
Power	: 150W
Warranty	: one year except print head
Packing size	: 45cm*40cm*42cm, 0.08CBM
G.W. /N.W.	: 17kg/15kg
Consumable	: foil (gold, silver, red, blue, black)

DIGITAL BUSINESS CARD CUTTER

Technical Specification

Model	: SF-EA3
Paper thickness	: 180-350gsm
Paper feed size	: SRA3, A3+, A3 size, 12"x18", 13"x19"
Cards size	: (85,89,90, 95mm, Customize) x (1-600mm) or (45,50,54mm)
Paper type	: Coated paper, Non-coated paper, Laminated paper
Programmable jobs	: Up to 20: 7 pre-programmed, 13 custom
Min cut length	: 40mm
Feed volume	: 10mm or 40pcs paper(0.25mm)
Feeding	: Double roller friction
Registration mark reader	: Yes
Cutting accuracy	: +/-0.05mm
Cutting speed	: 230 cards per minute
Machine dimensions	: 500 x 620 x 260mm
Weight	: 25Kg
Power supply	: AC 90-260V, 50/60Hz, 0.5A

Model
BBCA3





ColorCut FB9000 PRO
Automatic Digital Die Flatbed Cutter / Creaser



ColorCut T-SERIES FB1180T, B1
Digital-die Flatbed Cutter



SC 6500 Auto-Feed Digital
Die-cutting and creasing



LC 600 - Kiss-cut any shape label,
ultra-fast! Fully automated sheet label production.



Digital roll to roll label cutting at its very best - LCF215



Desktop CF350 model, foiling
and lamination system



ColorFlare CF1200 range,
foiling and lamination system



Coloured metallic foils, laminates
and holographic film supplies

TM



MARVEL

PRINT PACK SOLUTIONS



We are registered as trusted vendor on India Mart



indiamart



indiamart



For Any inquiry Please Call :

Call : +91 7775041144

E : marvelprintpacksolutions@gmail.com

Call : +91 7738390977

W : marvelprintpacksolutions.com



CONTACT US

Regd. Office:

Paradise Park 4/C/602, Y. K. Nagar, Behind New VIVA College, Virar (West)
Pin-401303, Dist.: Palghar, Maharashtra.

Sales and Service office:

Shop No.10, Ground Floor, Viva Mall, Opp. S.T. Bus Stand & Anita Gas Agency,
Virar West, District: Palghar, Maharashtra - 401303, INDIA

Gujarat Branch Office :

SUPER POWER (SCREEN INKS) : FF-31, Ravi Arcade, Opposite Gurudwara BRTS
Bus Stop, Dudheshwar, Ahmedabad-4, Gujarat, INDIA